
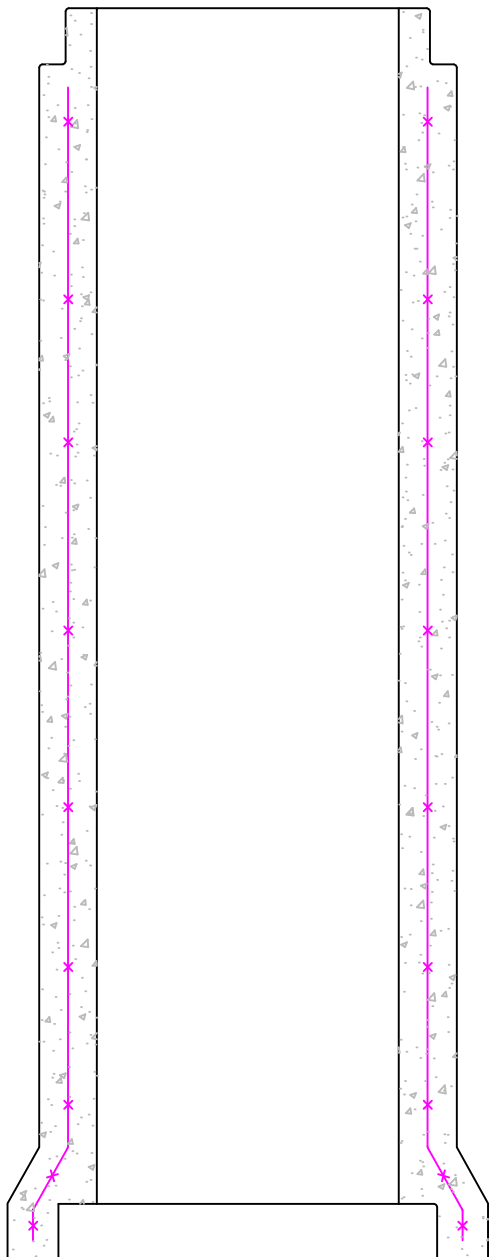



STANDARD ROUND PIPE

SUPER SEAL GASKET
ASTM C 443 (JOINTS)
ASTM C 76 (PIPE)



CLASS

	I	II	III	IV	V
D-Load (0.01 in. crack)	800	1,000	1,350	2,000	3,000
D-Load (Ultimate)	1,200	1,500	2,000	3,000	3,750

D-Load - Strength test requirements in pounds-force per linear foot per foot diameter of pipe when tested in 3-edge bearing.

INTERNAL DIAMETER INCHES	AREA OPENING SQUARE FEET	WALL THICKNESS INCHES	STANDARD LAYING LENGTH FEET	WEIGHT POUNDS PER FOOT
12	0.79	2	8	92
15	1.23	2 1/4	8	127
18	1.77	2 1/2	8	168
21	2.14	2 3/4	8	214
24	3.14	3	8	264
27	3.98	3 1/4	8	322
30	4.91	3 1/2	8	384
36	7.07	4	8	524
42	9.62	4 1/2	4, 6, 8	686
48	12.57	5	4, 6, 8	867
54	15.90	5 1/2	4, 6, 8	1,068
60	19.64	6	4, 6, 8	1,295
66	23.76	6 1/2	4, 6, 8	1,542
72	28.27	7	4, 6, 8	1,811



2202 WEST OVERLAND
SCOTTSBLUFF, NE 69361
PH: (308) 632-2161
FAX: (308) 632-2771